




★ **XB-D66**



Product Feature

- Support various barcodes such as WeChat and Alipay
- New decoding chip for interpreting various 1D and 2D barcodes
- Support Chinese direct transmission of QR code
- Plug and play, easy to set up and quickly match
- Wire life more durable

Product Size

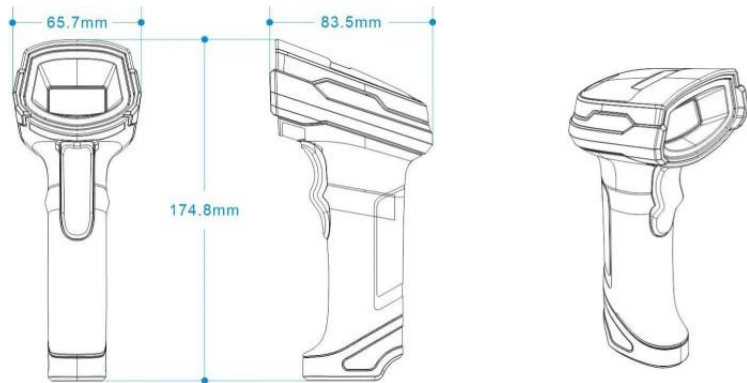

Specification

Performance Parameters

Light Sources: (Aimer)Green color LED, (Illumination)White color LED
Supported ID: Cod a bar, Code39, Code32Pharmaceutical (PARAF), Interleaved 2 of 5,
Symbologies: NEC 2 of 5, Code 93, Matrix 2 of 5, Straight 2 of 5 Industrial, Straight 2 of 5 IATA,
Code 11, Code128, GS1-128, UPC-A, UPC-E, EAN/JAN-8, EAN/JAN-13, MSI,
GS1 DataBar Omnidirectional, GS1 DataBarLimited, GS1 DataBar Expanded,
China Post(Hong Kong 2 of 5), Korea Post.
2D: Codeblock A, Codeblock F, PDF417, Micro PDF417, GS1 Composite Codes,
QR Code, Data Matrix, MaxiCode, Aztec, HANXIN.
Scanning Principle: Image CMOS
Resolution: 640*480
Print Contrast: 20%
Scan Angle: Yaw±65°, Rotation 360°, Pitch±65°
Depth of scan field: Code39(5mil): 7-16cm, Code39(13mil): 7-32cm
QR code (15mil): 3-18cm, Code128(20mil): 6-35cm
Error Rate: 1/5million
Interface: USB-HID, USB-COM
Transmission distance: 100M(Open Yard)
Communication mode: Paired dedicated receiver: 2.4G
Paired mobile Bluetooth devices: Dual-mode Bluetooth
Storage mode: Offline storage mode: When the scanner leaves the connection range,
the data is automatically stored. Storage capacity is 200K characters
Inventory storage mode: The scanner can enter inventory mode,
with a storage capacity of 200K characters
Pairing Mode: One to One: One Scanner Pairs One Receiver,
One scanner paired with a Bluetooth mobile device.
Receiving end: Dedicated Bluetooth U disk receiver, Android/IOS mobile device

Environmental Parameters

Operating Temperature: -20℃~50℃
Storage Temperature: -40℃~70℃
Ambient lighting: 0~100000LUX
Relative Humidity: 5% ~95% RH(Non-condensing)

Physical Parameters

Dimensions: 83.5mm*65.7mm*174.8mm
Material: ABS+PC
Cable Length: 1M

Shock Resistance: Withstands multiple times 1.5 meters drops to concrete

Electrical Parameters

Voltage: DC5V±5%
Operating Current: Standby Current >35 mA. WorkingCurrent >300mA
Standby Current: 0mA(Standby is to cut off battery power) Lithium battery: 2200mA Charging
Time: 3h Charging Mode: Typec charging cable, plug in and charge directly
Battery Working Time: 7h

Application

